

General - Presented in the load tables are maximum uniformly distributed specified loads.

Steel - Conforms to ASTM A653/A653M or A792/A792M. Grade 33/230; Yield stress 33 ksi/230 MPa and tensile stress 45 ksi/310 MPa. Grade 50 /345; Yield stress 50 ksi/345 MPa and tensile stress 65 ksi/450 MPa; Grade 80 /550; Yield stress 80 ksi/550 MPa and tensile stress 82 ksi/565 MPa.

Finishes - A25/ZF75, G90/Z275 or AZ50/AZM150. For heavier metallic coatings, refer to ASTM A653/A653M or A792/A792M.

Load Tables - The following information regarding the determination of the specified wind and snow loads is contained in the 2015 Edition of the National Building Code of Canada (NBCC). Importance factors are applied to both strength (ULS) and serviceability/deflection (SLS) limit state design considerations. A lower load factor for wind of 1.4, instead of 1.5 for live and snow loads is used. This lower load factor for wind some-what offsets the higher wind loads (1 in 50 year return) that are now listed in the NBCC by geographic location. The importance category of the end use of the building/structure must also be recognized, such as Normal or Low.

All of this will impact how the load tables are to be used. In an effort to help the design professional with the load tables, the information below was taken directly from Division B, Part 4 (Structural Design) of the NBCC.

Specified External Wind Load

$$W = I_w [q C_e C_t C_g C_p] \quad [1]$$

Importance Category	Importance Factor, I_w	
	ULS	SLS
Low	0.8	0.75
Normal	1.0	0.75
High	1.15	0.75
Post-Disaster	1.25	0.75

Specified Snow Load

$$S = I_s [S_s (C_b C_w C_s C_a) + S_f] \quad [2]$$

Importance Category	Importance Factor, I_s	
	ULS	SLS
Low	0.8	0.9
Normal	1.0	0.9
High	1.15	0.9
Post-Disaster	1.25	0.9

The importance factors, I_w and I_s , have been incorporated in the load tables, as well as the importance category. The parameters in the **boxed-in** portion of Equations [1] and [2] must be determined by the design professional in accordance with the NBCC.

Strength - The maximum uniformly distributed specified load based on strength in the load must be equal to or greater than the **specified live load**.

Serviceability (Deflection) - The maximum uniformly distributed specified load based on deflection in the load table must be equal to or greater than the **specified live load**. The effective moment of inertia for deflection determination was calculated at an assumed specified live load stress of **0.6F_y**.

EXAMPLE (Use of Load Table)

Ultra Span Wall (Normal Importance Category)

Given: (Metric units)

(LLF = 1.4 and $I_w = 0.75$)

~ Cladding thickness, $t = 0.762$ mm

~ Double span continuous, $L = 2.6$ m each span

~ Bearing length, $N = 50$ mm

~ L/240 deflection limit

~ Wind live load, $LL = 1.5$ kPa

The live load is the value of the boxed-in portion of the specified wind load expression [1].

Solution:

Strength "S"

1) Specified wind live load = 1.5 kPa

2) Maximum specified load (from Load Table) is **1.65 kPa**

Since **1.65 > 1.5** ∴ OK

3) Check web crippling ($N = 50$ mm)

a) End reaction = $0.375(1.5)2.6 = \mathbf{1.46 \text{ kN/m}}$

(from section property table)

$$P_e = P_{e1} + P_{e2} [N/t]^{1/2}$$

$$= 2.78 + 0.695[50/0.762]^{1/2} = \mathbf{8.41 \text{ kN/m}}$$

Since **8.41 > 1.46** ∴ OK

b) Interior reaction = $1.25(1.5)2.6 = \mathbf{4.88 \text{ kN/m}}$

(from section property table)

$$P_i = P_{i1} + P_{i2} [N/t]^{1/2}$$

$$= 5.29 + 0.900[50/0.762]^{1/2} = \mathbf{12.6 \text{ kN/m}}$$

Since **12.6 > 4.88** ∴ OK


Deflection "D"

From table L/180 = **3.26 kPa**

For L/240, multiply 3.26 by 180/240 = **2.45 kPa**

Since **2.45 > 1.5** ∴ OK

1. Based on ASTM A 653 structural steel.
2. Values in row "S" are based on strength.
3. Values in row "D" are based on deflection of 1/180th span.
4. Web crippling not included in strength calculation. See example.
5. Limit States Design principles were used in accordance with CSA Standard S136-16.

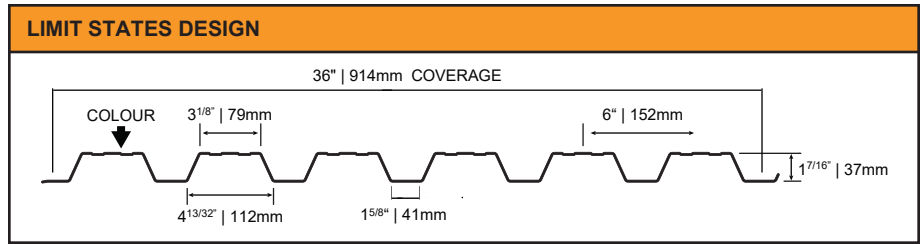

SECTION PROPERTIES | Per Foot of Width

Base Steel Thickness (in.)	Weight [G90] (psf)	Yield Stress (ksi)	Section Modulus		Deflection Moment of Inertia (in ⁴)	Specified Web Crippling Data			
			Midspan (in ³)	Support (in ³)		Pe1 End (lb)	Pe2 End (lb)	Pi1 Interior (lb)	Pi2 Interior (lb)
0.0180	1.04	33	0.0847	0.0884	0.0754	62.1	15.5	119	20.2
0.0180	1.04	50	0.0778	0.0822	0.0707	94.1	23.5	180	30.5
0.0240	1.36	33	0.128	0.130	0.114	116	29.1	222	37.7
0.0300	1.69	33	0.175	0.176	0.152	188	47.1	359	61.0


LLF = 1.40; IMPF = 0.75; NORMAL OCCUPANCY = 1.0

LOAD TABLE | Maximum Uniformly Distributed Specified Loads (psf).

Span Length (ft)		1-Span Base Steel Thickness (in.)				2-Span Base Steel Thickness (in.)				3-Span Base Steel Thickness (in.)			
		0.0180	0.0180	0.0240	0.0300	0.0180	0.0180	0.0240	0.0300	0.0135	0.0180	0.0240	0.0300
Y.S.* (ksi)		33	50	33	33	33	50	33	33				
4.0	S	75	104	113	154	78	110	115	155	98	138	144	194
4.0	D	137	128	207	276	329	308	497	662	259	243	391	521
4.5	S	59	82	89	122	62	87	91	123	77	109	114	153
4.5	D	96	90	145	194	231	217	349	465	182	171	275	366
5.0	S	48	67	72	99	50	70	74	99	63	88	92	124
5.0	D	70	66	106	141	168	158	254	339	133	124	200	267
5.5	S	40	55	60	82	41	58	61	82	52	73	76	103
5.5	D	53	49	80	106	126	119	191	255	100	93	151	200
6.0	S	33	46	50	69	35	49	51	69	43	61	64	86
6.0	D	41	38	61	82	97	91	147	196	77	72	116	154
6.5	S	28	39	43	58	30	42	44	59	37	52	55	74
6.5	D	32	30	48	64	77	72	116	154	60	57	91	121
7.0	S	24	34	37	50	26	36	38	51	32	45	47	63
7.0	D	26	24	39	51	61	58	93	123	48	45	73	97
7.5	S	21	30	32	44	22	31	33	44	28	39	41	55
7.5	D	21	19	31	42	50	47	75	100	39	37	59	79
8.0	S	19	26	28	39	20	28	29	39	24	34	36	49
8.0	D	17	16	26	34	41	39	62	83	32	30	49	65
8.5	S	17	23	25	34	17	24	26	34	22	30	32	43
8.5	D	14	13	22	29	34	32	52	69	27	25	41	54
9.0	S	15	21	22	30	15	22	23	31	19	27	28	38
9.0	D	12	11	18	24	29	27	44	58	23	21	34	46
9.5	S	13	18	20	27	14	20	20	28	17	24	26	34
9.5	D	10	10	15	21	25	23	37	49	19	18	29	39
10.0	S	12	17	18	25	13	18	18	25	16	22	23	31
10.0	D	9	8	13	18	21	20	32	42	17	16	25	33

*Y.S. = Yield Stress

1. Based on ASTM A 653M structural steel.
2. Values in row "S" are based on strength.
3. Values in row "D" are based on deflection of 1/180th span.
4. Web crippling not included in strength calculation. See example.
5. Limit States Design principles were used in accordance with CSA Standard S136-16.

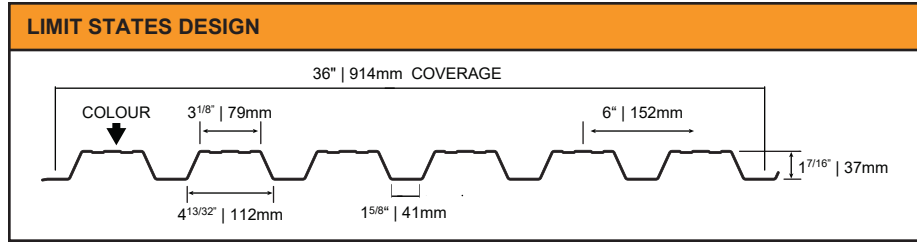

SECTION PROPERTIES | Per Metre of Width

Base Steel Thickness (mm)	Mass [Z275] (kg/m ²)	Yield Stress (MPa)	Section Modulus		Deflection Moment of Inertia (x10 ⁶ mm ⁴)	Specified Web Crippling Data			
			Midspan (x10 ³ mm ³)	Support (x10 ³ mm ³)		Pe1 End (kN)	Pe2 End (kN)	Pi1 Interior (kN)	Pi2 Interior (kN)
0.457	5.06	230	4.54	4.74	0.103	0.916	0.229	1.75	0.297
0.457	5.06	345	4.18	4.42	0.0965	1.37	0.344	2.62	0.446
0.610	6.66	230	6.87	7.00	0.155	1.72	0.429	3.27	0.556
0.762	8.26	230	9.37	9.43	0.207	2.78	0.695	5.29	0.900

LLF = 1.40; IMPF = 0.75; NORMAL OCCUPANCY = 1.0

LOAD TABLE | Maximum Uniformly Distributed Specified Loads (kPa).

Span Length (m)		1-Span Base Steel Thickness (mm)				2-Span Base Steel Thickness (mm)				3-Span Base Steel Thickness (mm)			
		0.457	0.457	0.610	0.762	0.457	0.457	0.610	0.762	0.457	0.457	0.610	0.762
YS.* (MPa)		230	345	230	230	230	345	230	230	230	345	230	230
1.0	S	5.37	7.42	8.13	11.1	5.61	7.84	8.28	11.2	7.01	9.80	10.4	14.0
1.0	D	11.9	11.2	17.9	23.9	28.5	26.8	43.1	57.3	22.4	21.1	33.9	45.2
1.2	S	3.73	5.15	5.64	7.70	3.90	5.45	5.75	7.75	4.87	6.81	7.18	9.68
1.2	D	6.87	6.45	10.4	13.8	16.5	15.5	24.9	33.2	13.0	12.2	19.6	26.1
1.4	S	2.74	3.78	4.15	5.66	2.86	4.00	4.22	5.69	3.58	5.00	5.28	7.12
1.4	D	4.32	4.06	6.54	8.71	10.4	9.75	15.7	20.9	8.17	7.68	12.4	16.5
1.6	S	2.10	2.90	3.17	4.33	2.19	3.06	3.23	4.36	2.74	3.83	4.04	5.45
1.6	D	2.90	2.72	4.38	5.83	6.95	6.53	10.5	14.0	5.47	5.14	8.28	11.0
1.8	S	1.66	2.29	2.51	3.42	1.73	2.42	2.55	3.44	2.16	3.03	3.19	4.30
1.8	D	2.03	1.91	3.08	4.10	4.88	4.59	7.38	9.83	3.85	3.61	5.81	7.74
2.0	S	1.34	1.85	2.03	2.77	1.40	1.96	2.07	2.79	1.75	2.45	2.59	3.49
2.0	D	1.48	1.39	2.24	2.99	3.56	3.34	5.38	7.17	2.80	2.63	4.24	5.64
2.2	S	1.11	1.53	1.68	2.29	1.16	1.62	1.71	2.31	1.45	2.03	2.14	2.88
2.2	D	1.11	1.05	1.68	2.24	2.67	2.51	4.04	5.39	2.11	1.98	3.18	4.24
2.4	S	0.93	1.29	1.41	1.92	0.97	1.36	1.44	1.94	1.22	1.70	1.80	2.42
2.4	D	0.86	0.81	1.30	1.73	2.06	1.94	3.11	4.15	1.62	1.52	2.45	3.27
2.6	S	0.79	1.10	1.20	1.64	0.83	1.16	1.22	1.65	1.04	1.45	1.53	2.06
2.6	D	0.68	0.63	1.02	1.36	1.62	1.52	2.45	3.26	1.28	1.20	1.93	2.57
2.8	S	0.69	0.95	1.04	1.41	0.72	1.00	1.06	1.42	0.89	1.25	1.32	1.78
2.8	D	0.54	0.51	0.82	1.09	1.30	1.22	1.96	2.61	1.02	0.96	1.54	2.06
3.0	S	0.60	0.82	0.90	1.23	0.62	0.87	0.92	1.24	0.78	1.09	1.15	1.55
3.0	D	0.44	0.41	0.66	0.88	1.05	0.99	1.59	2.12	0.83	0.78	1.26	1.67

*Y.S. = Yield Stress